

LEADING EDGE HEAT CONTROL WITH USER FRIENDLY INTERFACE

The *TempMaster* MT controller maximizes injection molding performance and offers the lowest cost of ownership. All TempMaster controllers feature the **NEW** APS (Adaptive Process System) technology providing faster processing and response speed.

BENEFITS

Out-of-the-box user friendly

- Intuitive touch screen interface
- Modular design with 2-zone control cards
- Cable set included
- Quick start guide for easy start-up
- NEW** Leak Detection feature

Improves the performance of any hot runner system

- Unique low voltage soft start method
- APS (Adaptive Process System) control algorithm
- Phase angle and burst firing modes (time proportional, zero-crossing)
- Wide range of user settings

Plug and play system architecture

- Patented "all-in-one" control card designed for reliability
- Cabinets are fully wired for maximum expansion
- No special setting required for start-up
- 15A per zone

Future now technology

- Color touch screen display
- Most advanced micro controller technology
- Switch mode power supply
- Infield calibration mode
- Continuous ground fault and current measurement

High quality, robust design

- Compact solid metal enclosure
- Heavy duty industrial connectors
- Mold and controller protection features
- On-board load and thermocouple fuses



▲ TempMaster MT - various cabinet options



▲ TempMaster MT 2-zone control module


AT
 P: 0800 301 060
 F: 0800 401 020
dme_oesterreich@milacron.com

BE
 P: +32 (0) 15 28 87 30
 F: +32 (0) 15 40 51 17
dme_benelux@milacron.com

CH
 P: +41 0848 567 364
 F: +41 0848 567 365
dme_schweiz@milacron.com

CZ
 P: 800 142 451 | +420 572 151 754
 F: 800 142 450 | +420 571 611 996
dme_cz@milacron.com


DE
 P: 0800 664 82 50 | +49 (0) 2351 437 0
 F: 0800 664 82 51 | +49 (0) 2351 437 220
dme_normalien@milacron.com


ES
 P: 900 900 342
 F: 900 900 343
dme_iberia@milacron.com

FR
 P: +33 1 49 93 92 23
 F: +33 1 49 93 92 22
dme_france@milacron.com

HU
 P: 0680 205 00 | +32 15 28 87 30
 F: +32 15 40 51 17
dme_hungary@milacron.com

IT
 P: 800 089 734
 F: 800 089 735
dme_italy@milacron.com

NL
 P: +31 (0) 20 654 5571
 F: +31 (0) 20 654 5572
dme_benelux@milacron.com

PL
 P: +800 331 1312 | +32 15 21 50 92
 F: +800 331 1313 | +32 15 40 51 92
dme_polska@milacron.com

PT
 P: 800 207 900
 F: 800 207 901
dme_iberia@milacron.com

SK
 P: 0800 142 451 | +420 572 151 754
 F: 0800 142 450 | +420 571 611 996
dme_cz@milacron.com


UK
 P: +44 2071 3300 37
 F: +44 2071 3300 36
dme_uk@milacron.com

Other Countries
 P: +32 15 28 87 30
 F: +32 15 40 51 17
dme_export@milacron.com

TempMaster MT Controller Specifications


User Interface	Full color LCD touch screen
Display Size	2 inches (176 x 200 pixels)
Calibration Accuracy	1°F / 0.5°C
Control Accuracy	+/- 1°
Power Response Time	8.3 ms at 60 Hz
Control Algorithm	APS (Adaptive Process System)
Scale	°C / °F Software selectable
Thermocouple	J or K-Type, software selectable
Operating Range	0 - 472°C or 32 - 882°F
Output Voltage	Maximum 264 VAC
Supply Voltage	95-265Vac
Frequency	50 - 60 Hz automatic switching
Ambient Temperature Range	5 - 45°C (41 - 113°F)
Humidity Range	Up to 95% non-condensing
Ground Fault Detection	40mA per zone
Power Control	Phase angle and burst firing modes (time proportional, zero-crossing)
Overload Protection	Semi-conductor fuses on both legs
Control Modes	Closed loop (Auto), open loop (Manual)
Alarm Output	Closing contact relay max. 5A, 230V
T/C Connector	Various options available
Power Connector	Various options available
Soft-Start with Auto Tune	Using unique low voltage method for heater safety
Input Protection	Plug in nano fuses on both T/C legs
Controller includes 15ft (4.8m) cables	

Specifications may change without notice

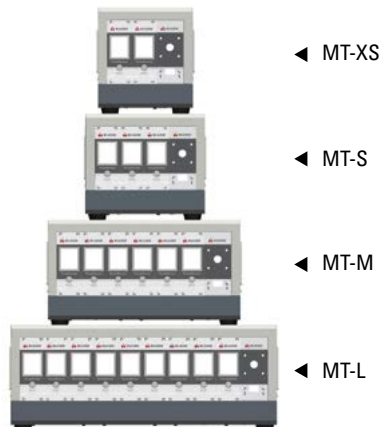

Cabinet sizing	# of Cards by Bay	Dimensions (W x D x H cm)
MT-XS	2 (up to 4 zones)	21x35x21
MT-S	3 (up to 6 zones)	26x35x21
MT-M	6 (up to 12 zones)	40x35x21
MT-L	9 (up to 18 zones)	57x35x21


AT
 P: 0800 301 060
 F: 0800 401 020
dme_oesterreich@milacron.com

BE
 P: +32 (0) 15 28 87 30
 F: +32 (0) 15 40 51 17
dme_benelux@milacron.com

CH
 P: +41 0848 567 364
 F: +41 0848 567 365
dme_schweiz@milacron.com

CZ
 P: 800 142 451 | +420 572 151 754
 F: 800 142 450 | +420 571 611 996
dme_cz@milacron.com


DE
 P: 0800 664 82 50 | +49 (0) 2351 437 0
 F: 0800 664 82 51 | +49 (0) 2351 437 220
dme_normalien@milacron.com


ES
 P: 900 900 342
 F: 900 900 343
dme_iberia@milacron.com

FR
 P: +33 1 49 93 92 23
 F: +33 1 49 93 92 22
dme_france@milacron.com

HU
 P: 0680 205 00 | +32 15 28 87 30
 F: +32 15 40 51 17
dme_hungary@milacron.com

IT
 P: 800 089 734
 F: 800 089 735
dme_italy@milacron.com

NL
 P: +31 (0) 20 654 5571
 F: +31 (0) 20 654 5572
dme_benelux@milacron.com

PL
 P: +800 331 1312 | +32 15 21 50 92
 F: +800 331 1313 | +32 15 40 51 92
dme_polska@milacron.com

PT
 P: 800 207 900
 F: 800 207 901
dme_iberia@milacron.com

SK
 P: 0800 142 451 | +420 572 151 754
 F: 0800 142 450 | +420 571 611 996
dme_cz@milacron.com

UK
 P: +44 2071 3300 37
 F: +44 2071 3300 36
dme_uk@milacron.com

Other Countries
 P: +32 15 28 87 30
 F: +32 15 40 51 17
dme_export@milacron.com