




FROM PELLET TO PART
YOUR PARTNER
FOR PRODUCTIVITY
AND SUSTAINABILITY



NEW FROM DME METRIC SCREWS

SOCKET HEAD CAP SCREWS DIN 912- 12,9

M

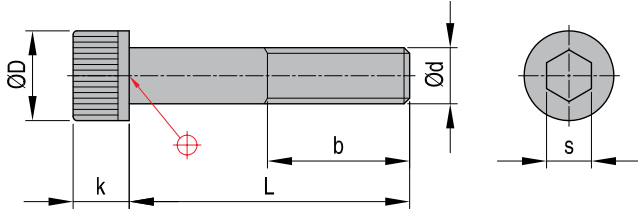

Mat.: Steel without surface treatment



Order example for first item (d + L): **M310**

d	L																			Full thread if L ≤	b	D	k	S						
	6	8	10	12	14	16	18	20	22	25	30	35	40	45	50	55	60	65	70						75	80	85	90		
M2	•	•	•	•		•		•																	20	16	3,8	2	1,5	
M2,5				•		•		•																		25	17	4,5	2,5	2
M3	•	•	•	•	•	•		•		•		•														20	18	5,5	3	2,5
M4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•											25	20	7	4	3
M5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							25	22	8,5	5	4
M6		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		30	24	10	6	5
M8			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		35	28	13	8	6
M10			•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		40	32	16	10	8

d	L																			Full thread if L ≤	b	D	k	S						
	95	100	105	110	115	120	130	135	140	150	160	170	180	190	200	210	220	230	240						250	260	270	280		
M6	•	•	•	•		•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		30	24	10	6	5	
M8	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		35	28	13	8	6	
M10	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		40	32	16	10	8

d	L																			Full thread if L ≤	b	D	k	S							
	12	16	18	20	22	25	30	35	40	45	50	55	60	65	70	75	80	85	90						95	100	105	110	115	120	130
M12	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	50	36	18	12	10
M14					•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	55	40	21	14	12
M16				•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	60	44	24	16	14
M20						•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	75	52	30	20	17
M24								•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	85	60	36	24	19
M27		•																									90	66	40	27	19
M30				•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	100	72	45	30	22
M36																											110	84	54	36	27

d	L																				Full thread if L ≤	b	D	k	S						
	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	320						330	340	360	380	400	420
M12	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	50	36	18	12	10
M16		•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	60	44	24	16	14
M20			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	75	52	30	20	17
M24				•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	85	60	36	24	19
M27		•			•		•		•		•		•		•		•		•		•		•		•	90	66	40	27	19	
M30			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	100	72	45	30	22
M36					•																						110	84	54	36	27




FROM PELLET TO PART
YOUR PARTNER
FOR PRODUCTIVITY
AND SUSTAINABILITY



NEW FROM DME METRIC SCREWS

LOW HEAD SOCKET CAP SCREWS DIN 7984- 8.8

LHM

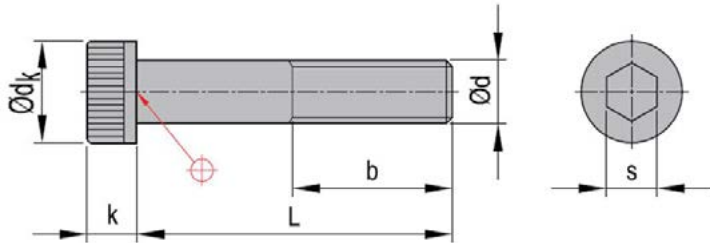

Mat.: Steel without surface treatment



Ordering example for the first item (LH + d + L): **LHM416**

d	L																Full thread if L ≤	b	D	k	S
	8	10	12	14	16	18	20	22	25	30	35	40	45	50	55	60					
M4	•	•	•		•		•		•	•	•	•					20	14	7	2,8	2,5
M5	•	•	•	•	•	•	•		•	•	•	•					25	16	8,5	3,5	3
M6	•	•	•	•	•	•	•	•	•	•	•	•	•	•			25	18	10	4	4
M8			•	•	•	•	•	•	•	•	•	•	•	•	•		30	22	13	5	5
M10					•				•	•	•	•	•	•	•		35	26	16	6	7
M12								•	•	•	•	•	•	•	•		45	30	18	7	8

